

40/10 VF

Automatic horizontal sliding car door



Door configuration

LIFT APPLICATION

Door cycles per year:	Up to 800.000.
Traffic peak of the door:	Up to 240 cycles per hour.
Traffic lift speed:	Up to 2,5 m/s.

APPLICATION RANGE


Opening	Clear opening - PL (mm)	Clear height - HL (mm)
C2	600 - 1.400	2.000 - 2.400
C4	600 - 2.400	
T2 - T3 - T4	600 - 1.400	

PANELS

Opening	Steel panels					Glass panels				
	Metal sheet ⁽²⁾	Double skin	Vision	Fritted vision	Wien type vision	Bevel big vision	Flush big vision	Full glass in skirting	Full glass in moorings	Aluminium glass
										
C2 - C4 - T2 - T3 - T4	✓	✓	✓	✗	✓	✓	✓	✓	✗	✓

(2) Solid execution option.

SILLS

Type of sill	Aluminium	Reinforced aluminium	Steel	Steel concealed	Massive
Profile detail					
Availability	✓	✓	✓	✗	✓
Heated sill option	✓	✓ ⁽³⁾	✓	✗	✗
Dust holes	✓	✓	✓	✗	✓
Sill support	✓	✓	✓	✗	✓

(3) Not available for C2.

STANDARDS

Opening	EN 81-1/2 Safety rules	EN 81-21 Existing buildings	EN 81-41 Impaired mobility	EN 81-71 Vandal resistance lifts		EN 81-72 Firefighters lifts	EN 81-1/2 Safety rules
				Cat. I	Cat. II		
C2 - C4 - T2 - T3 - T4	✓	✓	✓	✗	✗	✓	✓

PROTECTION

Opening	IP20 Protection against a solid foreign body of 12,5 mm or more in diameter.	IPX3 Protected against sprays of water up to 60 degrees from the vertical.	IP54 Protection against dust and protected against water splashed from all directions.		IP65 Sealed against dust and protected against jets of water from all directions.	EEx Explosion proof, Group II (surface industries) and Category 2 (explosive atmosphere between 10 and 1.000 hrs/yr).
			Magnetic contact	Mechanical contact		
C2 - C4 - T2 - T3 - T4	✓	✓	✗	✓	✓	✗

Available⁽¹⁾. Not available.  Ask the commercial department.



⁽¹⁾Some option combinations may not be possible.

Door configuration


SAFETY DEVICES

Opening	Photocell	Photoelectric barrier		Safety edge	Emergency power supply		
		Static	Dynamic		VF4+	VF5	VF6
C2 - C4 - T2 - T3 - T4	✓	✓	✗	✗	✓		✗

PANEL REGULATION SUPPORT AND PANEL GUIDE

Type of panel regulation support	Plus	
Type of panel guide	Plus	

COMPATIBILITY

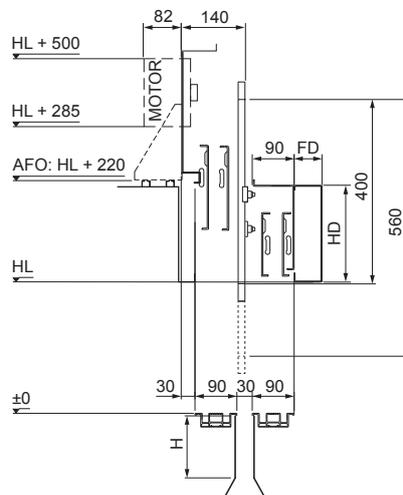

Case	40/10 landing door		
Coupling	Symmetrical clutch		Pre-opening symmetrical clutch
Unlocking zone	+111 / -290		+261 / -290
Toe guard type	Big	2 section	3 section
H*	750	812 (495)	798 (405)
Thickness	1,5	1,5	1,5
Range	All	650 - 1.200	650 - 1.200

*Retracted toe guard dimension between brackets.
T2 opening shown.
FD 20 / 25 / 40 / 60 / 140.
HD 265 / 210 / 120 / 100 / 80.
If not otherwise indicated all dimensions in mm.


CAMS

Compatibility	Semiautomatic hinged landing door: Aluminium - Glass, Global, Fermator, B+				
Type of cam	Frontal retractable	Lateral retractable	Inverted retractable	Flexible fixed	Fixed
Cam detail					

Available⁽¹⁾ Not available.  Ask the commercial department.

⁽¹⁾Some option combinations may not be possible.

Technical features

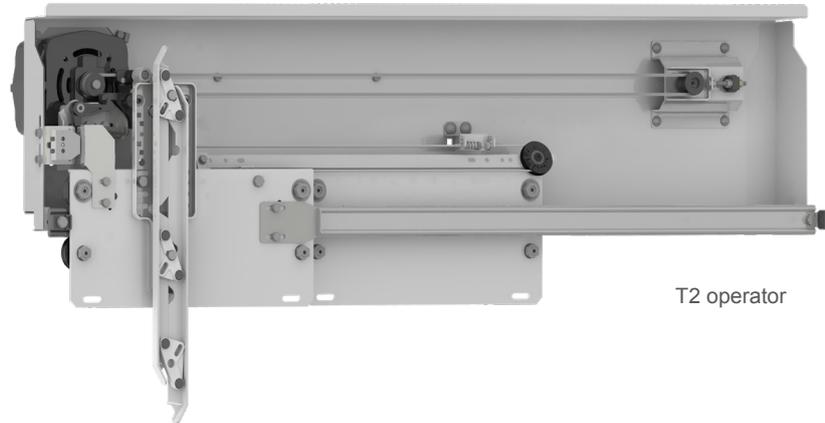

DRIVE

Type	Asynchronous three-phase motor.		
Efficiency	60%.		
Consumptions	Standby 4 W / Average per cycle 50 W.		
Transmission	Gearless.	PL 600 - 3.000 mm.	HTD 5M belt.

ELECTRONIC MODULE

Type	VF5+ and VF6.		
Adjustable parameters via	PC / Console.		
Working signals available	From 12 V to 230 V AC/DC or with BUS CAN (Only for VF6).		
Opening speed	Up to 1 m/s. Manually adjustable and auto-adjustable directly with the panel weight.		
Closing speed	Up to 0,6 m/s. Manually adjustable and auto-adjustable directly with the panel weight.		
Re-opening	Integrated with auto-adjustable cycles.		

GENERAL FEATURES


Noise level	< 53 dB.		
Total weight	Reference: T2 PL 800 mm HL 2.000 mm, with sheet metal panels - 71 kg.		
Maximum moving mass	250 kg.		
Locking device	Car door lock.		

INSTALLATION


Pre-adjusted and tested to simplify the installation.

Technical drawing 4 panel centre parting door

90 mm sill
Single coupling system (PL 600 - 1.150)

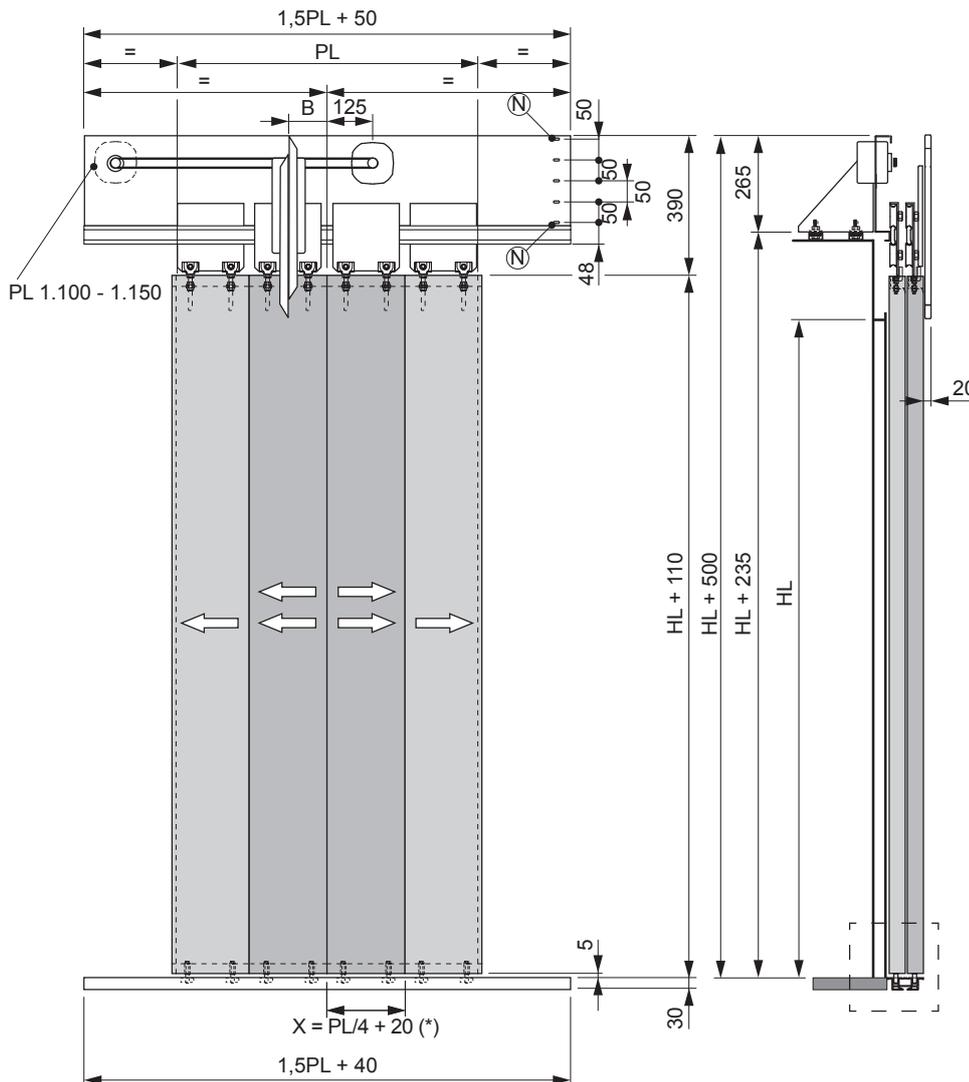


FIXING BRACKET RANGE


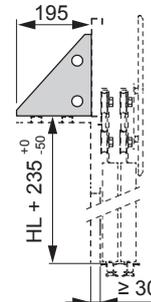


STATIC
CV BRACKET

MECHANICAL DETAILS

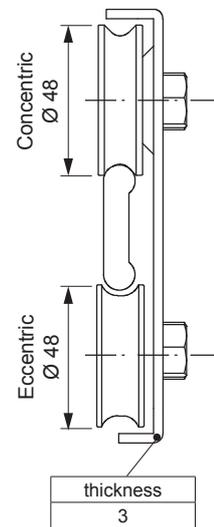

SILL DETAIL

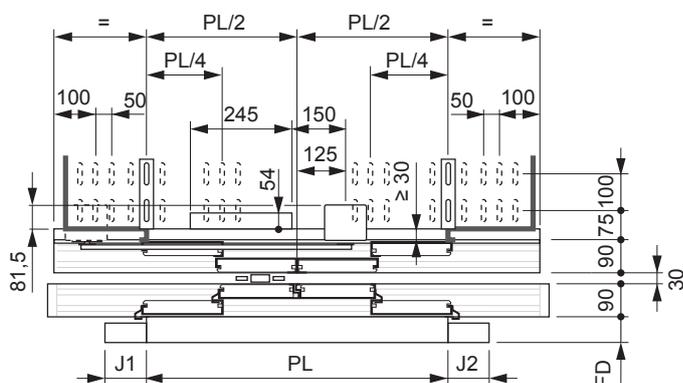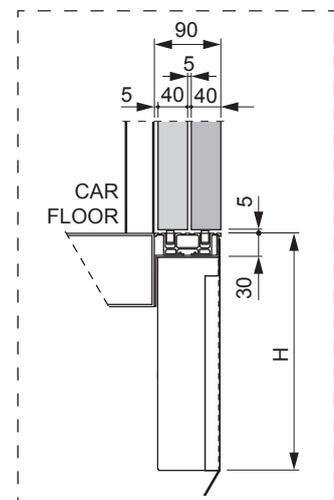


Notes:


- * Full glass panel type only if X ≥ 195.
- N Recommended vertical fixing point for brackets.
- B For PL ≤ 900 = 100. For PL ≥ 950 = 160.
- J1 - J2 See landing door technical data sheet for available dimensions.
- FD 20 / 25 / 40 / 60 / 140.
- If not otherwise indicated all dimensions in mm.

Technical drawing 4 panel centre parting door


70 mm sill
Single coupling system (PL 600 - 1.150)

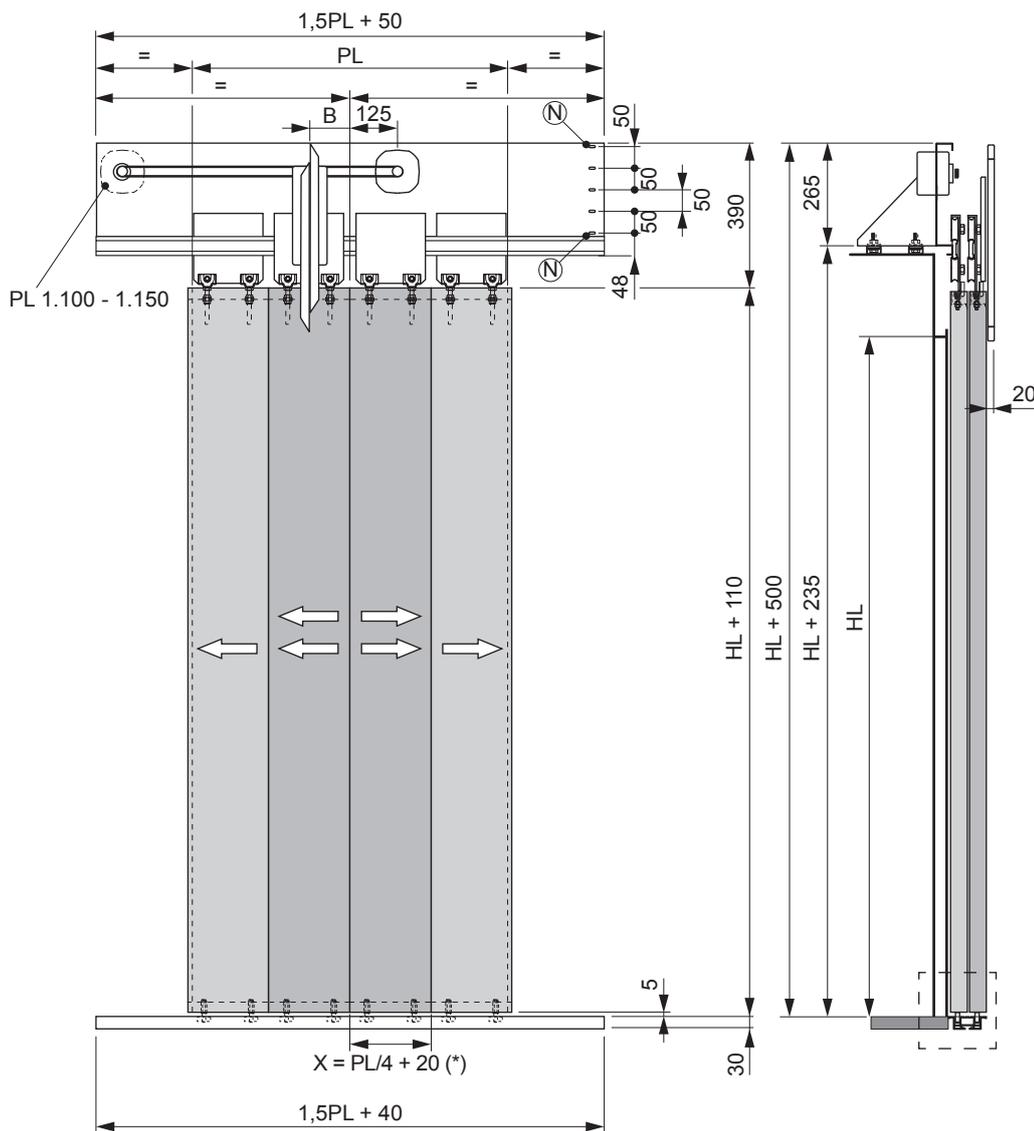



FIXING BRACKET RANGE

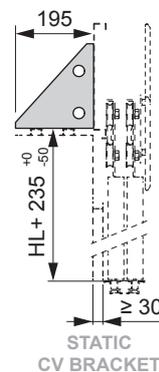

MECHANICAL DETAILS

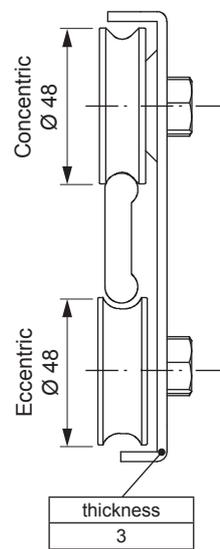



SILL DETAIL

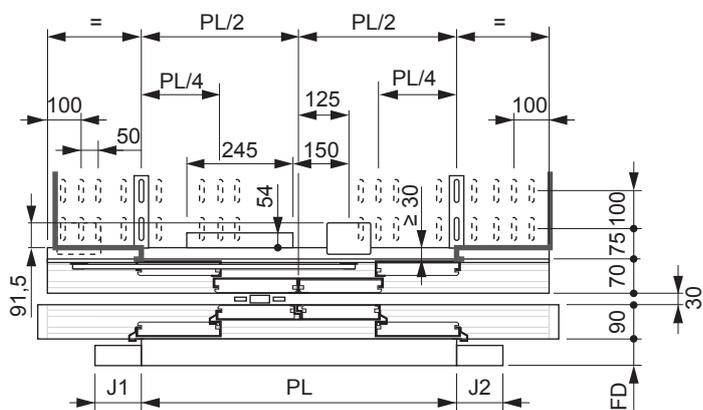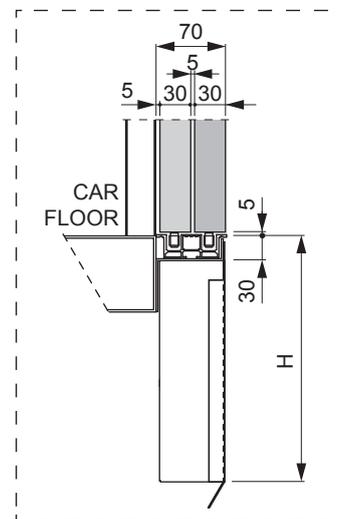


- Notes:
- * Full glass panel type only if $X \geq 195$.
 - N Recommended vertical fixing point for brackets.
 - B For $PL \leq 750 = 100$. For $PL \geq 800 = 160$.
 - J1 - J2 See landing door technical data sheet for available dimensions.
 - FD 20 / 25 / 40 / 60 / 140.
 - If not otherwise indicated all dimensions in mm.

Technical drawing 4 panel centre parting door



80 mm sill

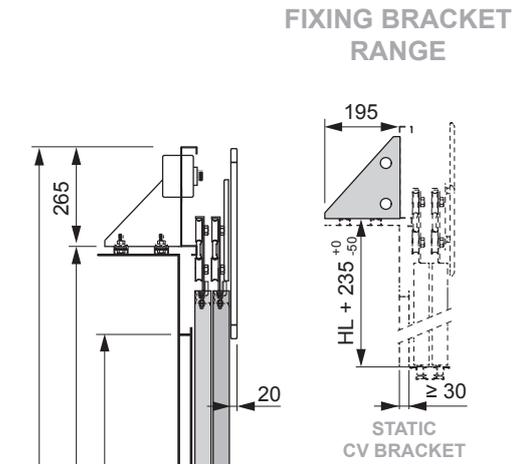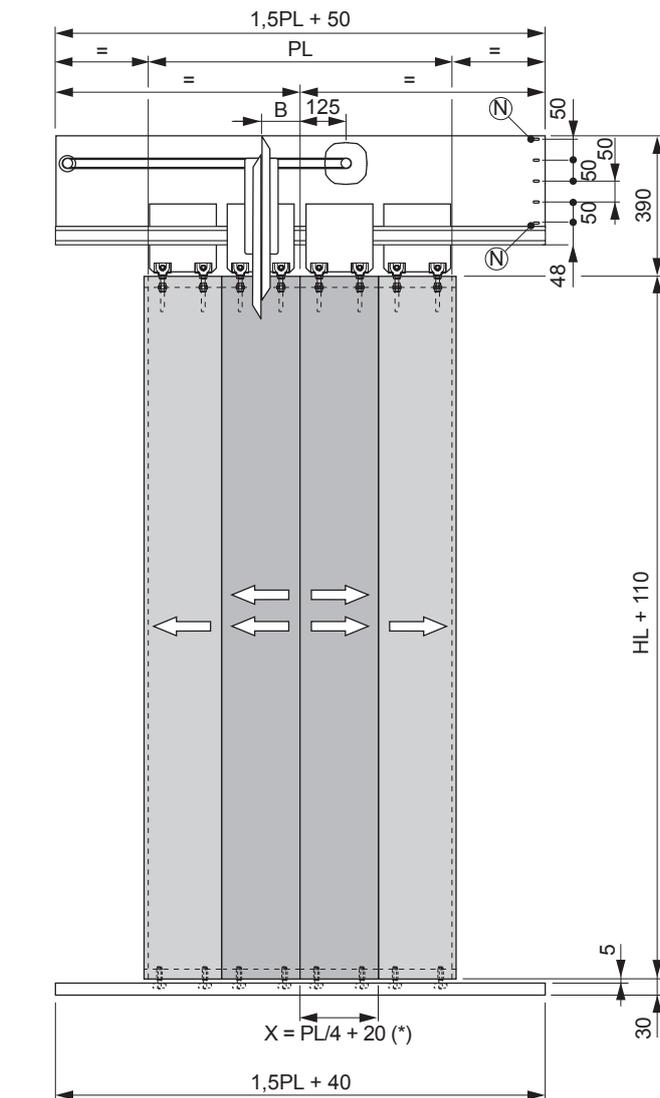

MECHANICAL DETAILS

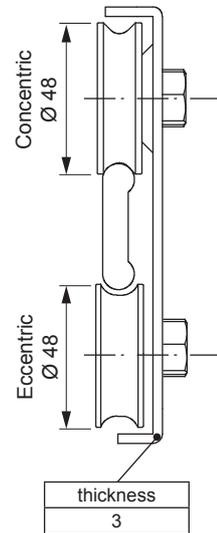


SILL DETAIL

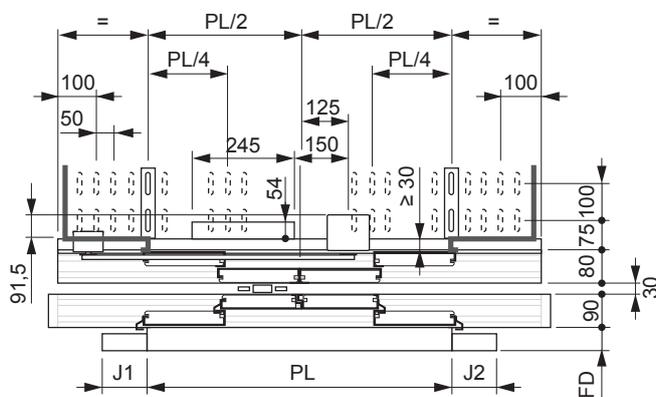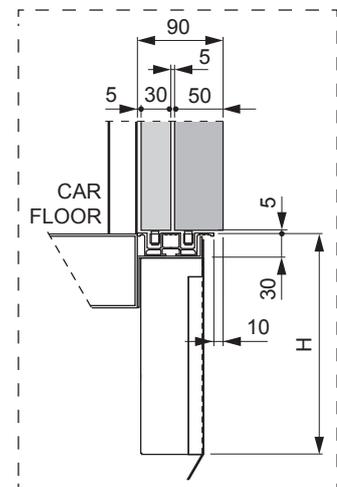


Notes:
* Full glass panel type only if $X \geq 195$.
N Recommended vertical fixing point for brackets.
B For $PL \leq 900 = 100$, For $PL \geq 950 = 160$.
J1 - J2 See landing door technical data sheet for available dimensions.
FD 20 / 25 / 40 / 60 / 140.
- If not otherwise indicated all dimensions in mm.

Technical drawing 2 panel side opening door

90 mm sill

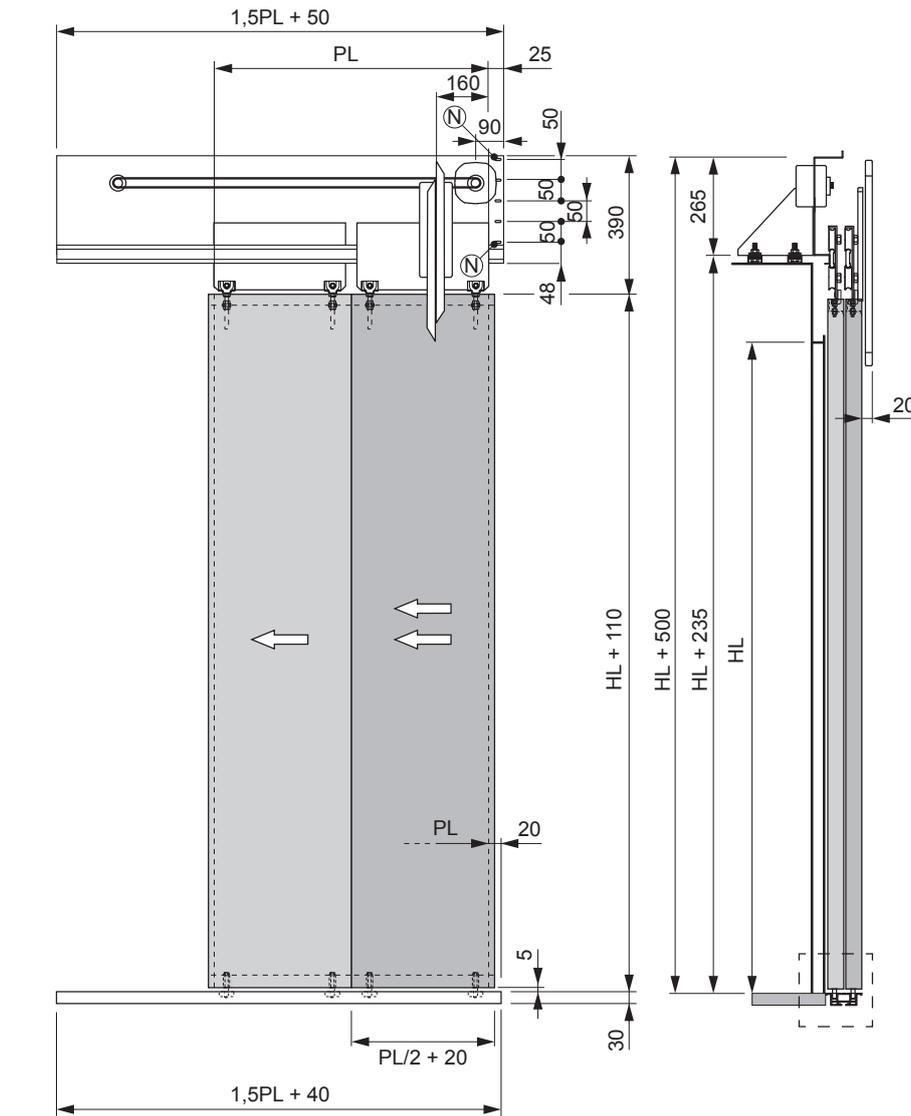


FIXING BRACKET RANGE

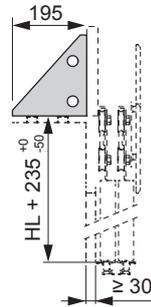



STATIC
CV BRACKET

MECHANICAL DETAILS

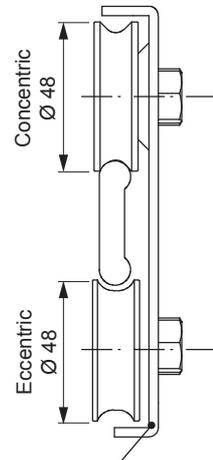

thickness
PL ≤ 700 = 3
PL ≥ 750 = 2,5

SILL DETAIL

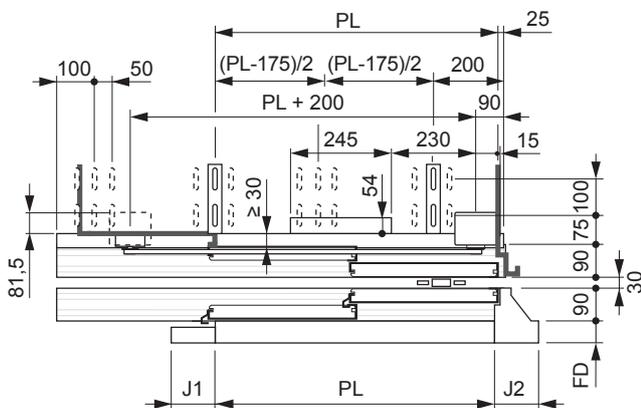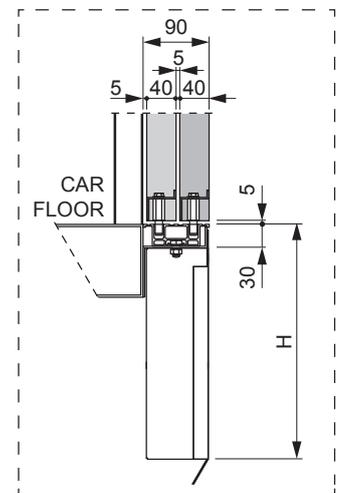


Notes:


- N Recommended vertical fixing point for brackets.
- J1 - J2 See landing door technical data sheet for available dimensions.
- FD 20 / 25 / 40 / 60 / 140.
- If not otherwise indicated all dimensions in mm.

Technical drawing 2 panel side opening door

70 mm sill

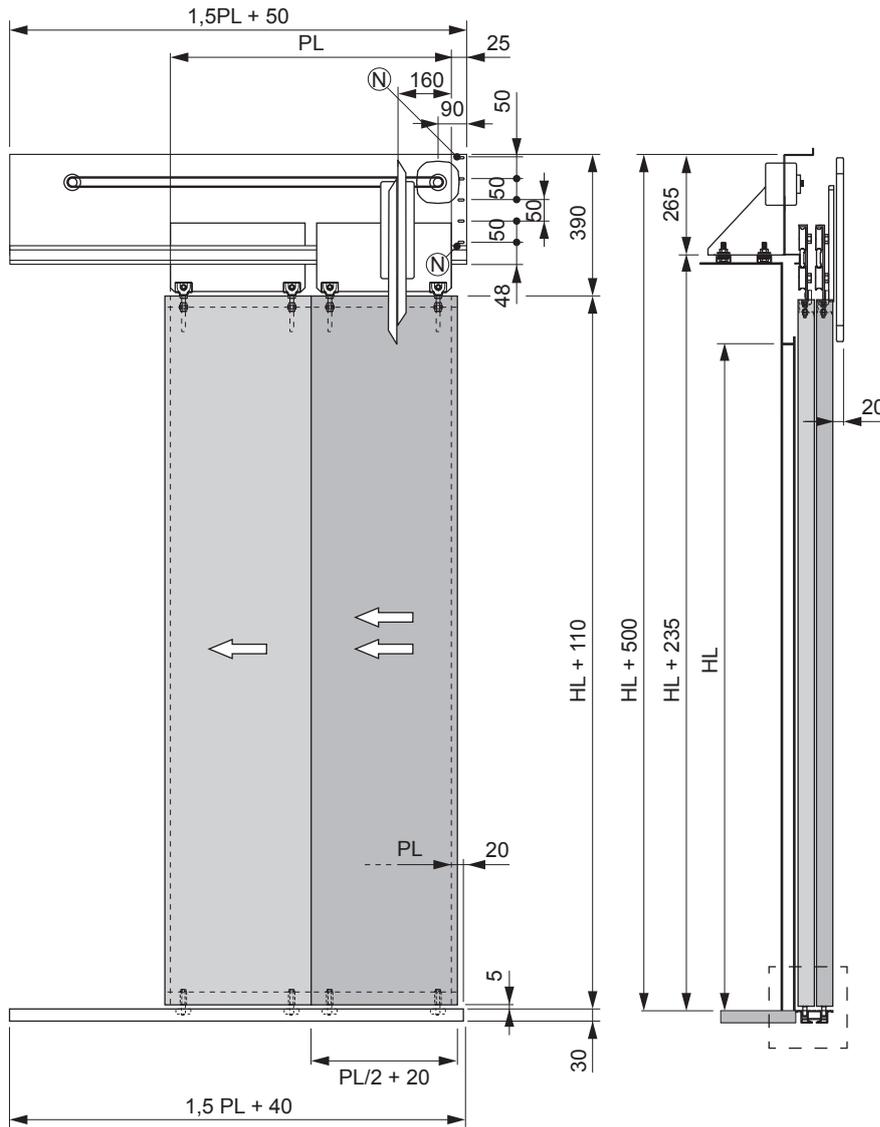


FIXING BRACKET RANGE

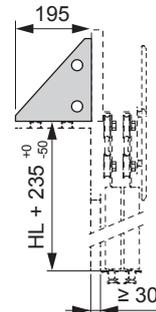



STATIC
CV BRACKET

MECHANICAL DETAILS

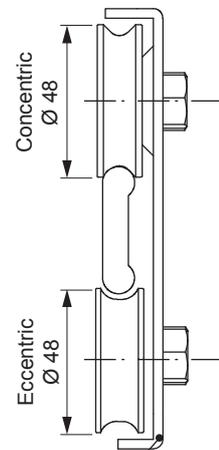

thickness
$PL \leq 1.050 = 3$
$PL \geq 1.100 = 2,5$

SILL DETAIL

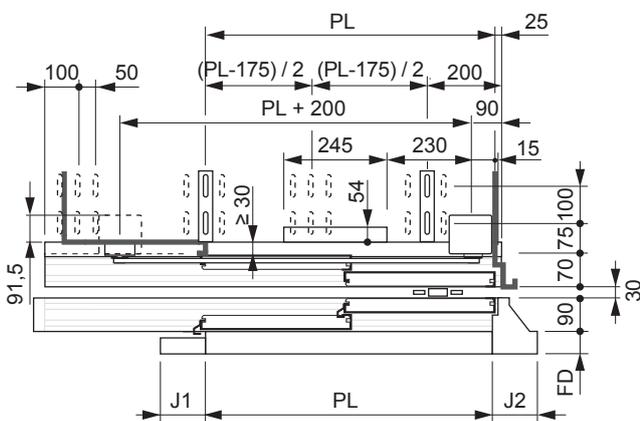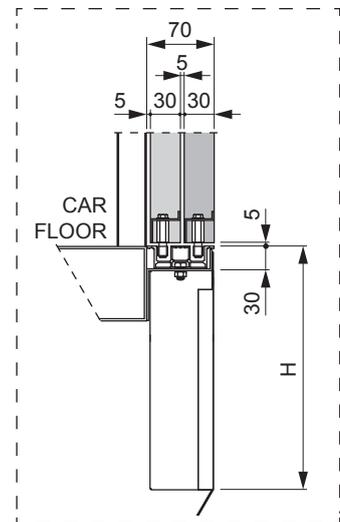


Notes:


- N Recommended vertical fixing point for brackets.
- J1 - J2 See landing door technical data sheet for available dimensions.
- FD 20 / 25 / 40 / 60 / 140.
- If not otherwise indicated all dimensions in mm.

Technical drawing 3 panel side opening door


135 mm sill

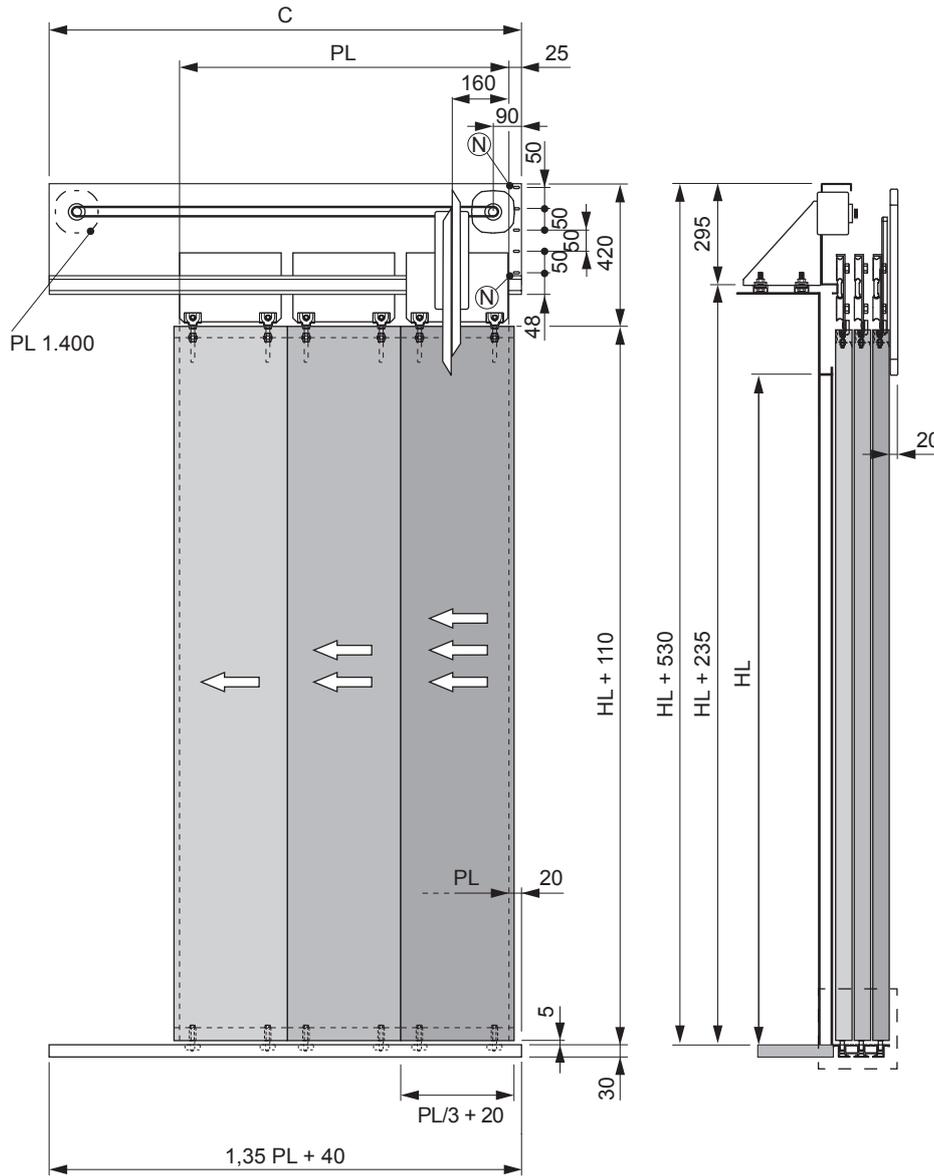



FIXING BRACKET RANGE

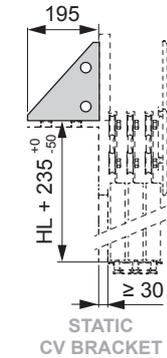

MECHANICAL DETAILS

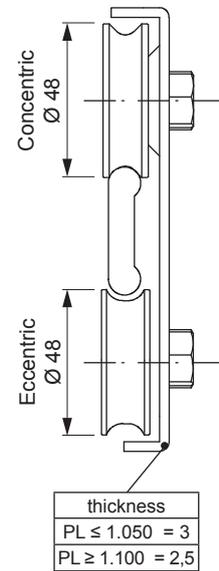

SILL DETAIL

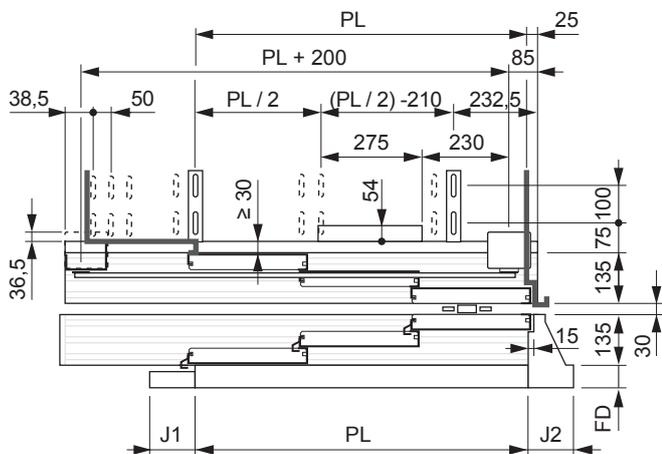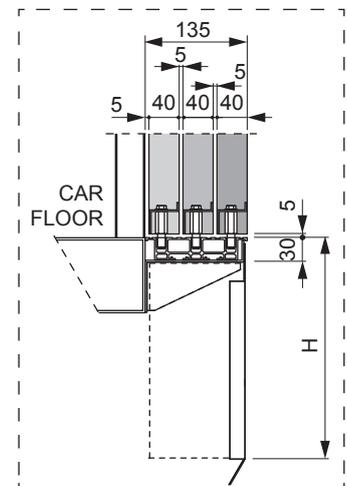


PL	600	650	700	750	800	850	900	915	950
C	895	945	995	1.045	1.120	1.195	1.245	1.275	1.345
PL	1.000	1.050	1.100	1.150	1.200	1.250	1.300	1.350	1.400
C	1.395	1.445	1.545	1.595	1.695	1.745	1.795	1.845	1.945

Notes:


- N Recommended vertical fixing point for brackets.
- J1 - J2 See landing door technical data sheet for available dimensions.
- FD 20 / 25 / 40 / 60 / 140.
- If not otherwise indicated all dimensions in mm.

Technical drawing 4 panel side opening door


180 mm sill

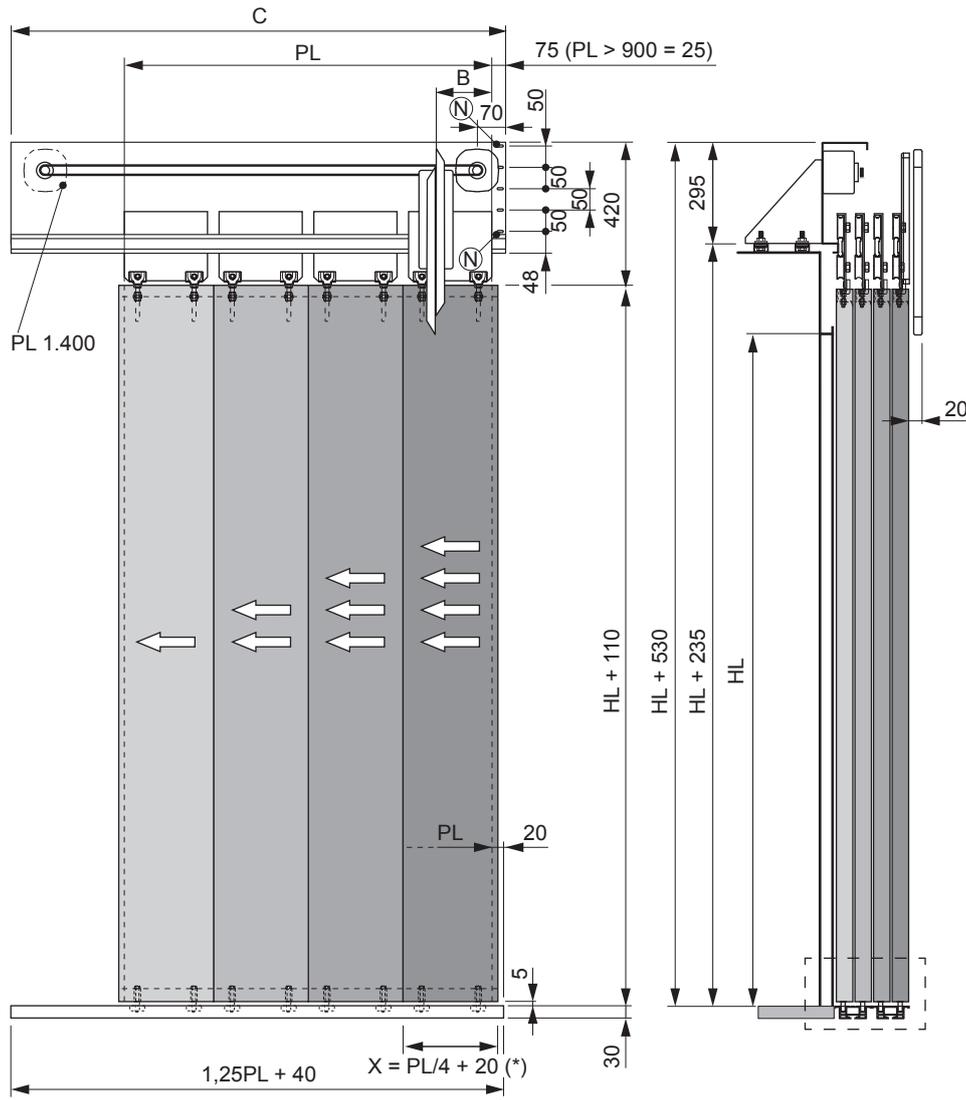



FIXING BRACKET RANGE

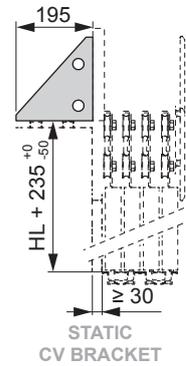

MECHANICAL DETAILS

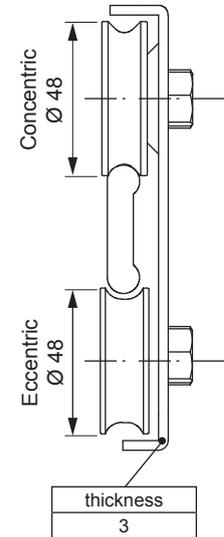

SILL DETAIL

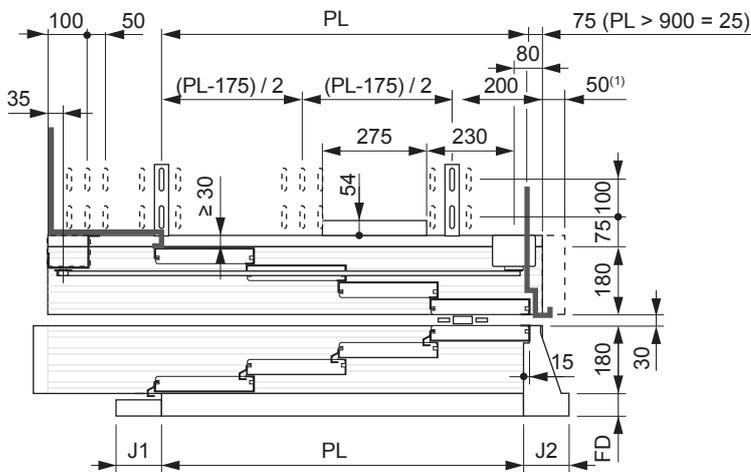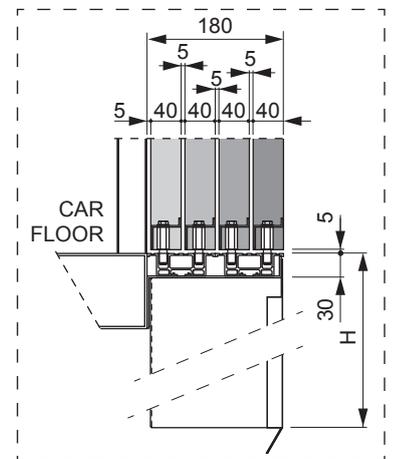


PL	600	650	700	750	800	850	900	1.000	1.100	1.200	1.300	1.400
C	850	910	975	1.035	1.100	1.160	1.225	1.300	1.425	1.550	1.675	1.800


- Notes:
- * Full glass panel type only if $X \geq 195$.
 - 1 Only with semiautomatic hinged landing door.
 - N Recommended vertical fixing point for brackets.
 - B For $PL \leq 900 = 100$. For $PL \geq 950 = 160$.
 - J1 - J2 See landing door technical data sheet for available dimensions.
 - FD 20 / 25 / 40 / 60 / 140.
 - If not otherwise indicated all dimensions in mm.

Technical drawing 4 panel side opening door


140 mm sill

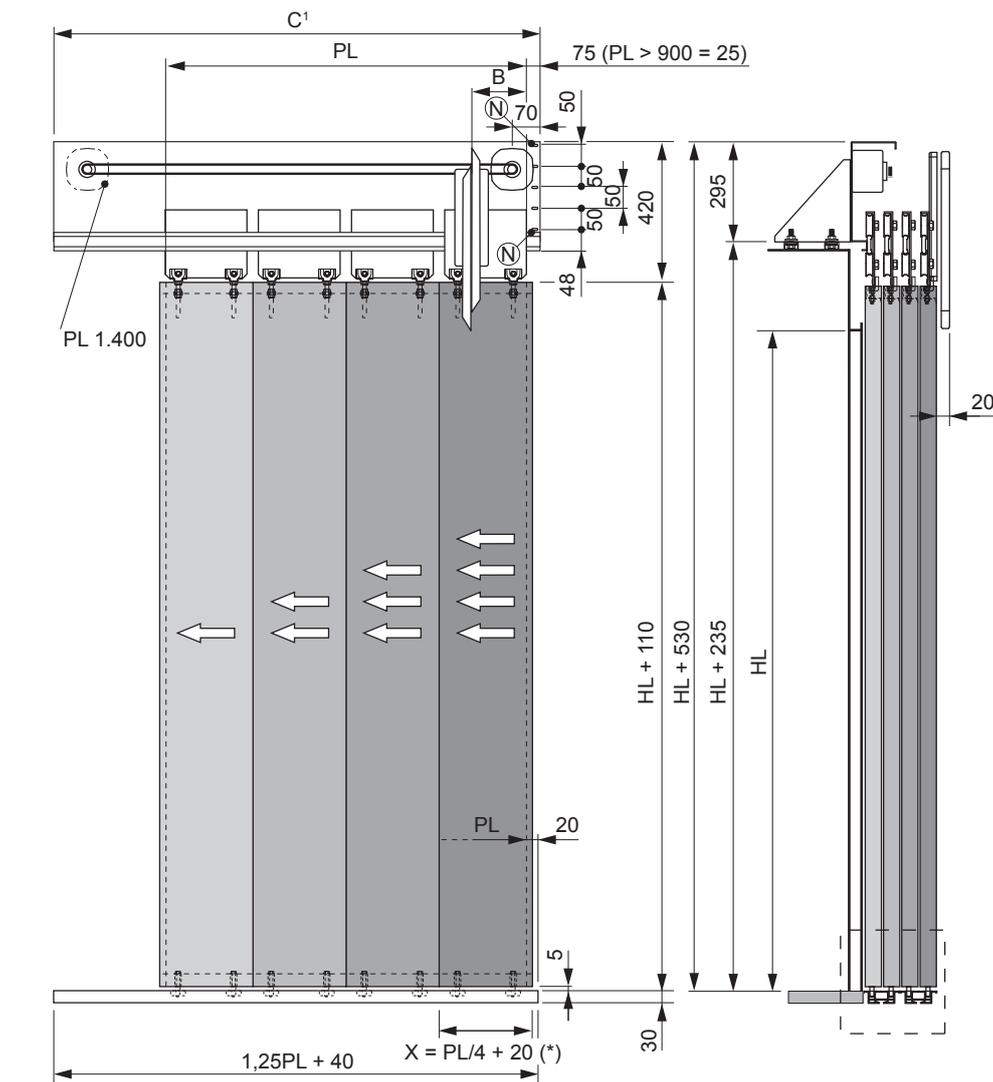



FIXING BRACKET RANGE

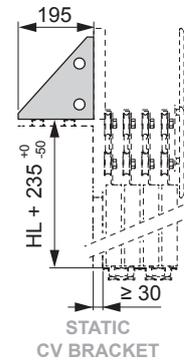

MECHANICAL DETAILS

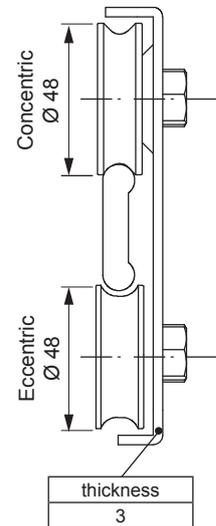

SILL DETAIL

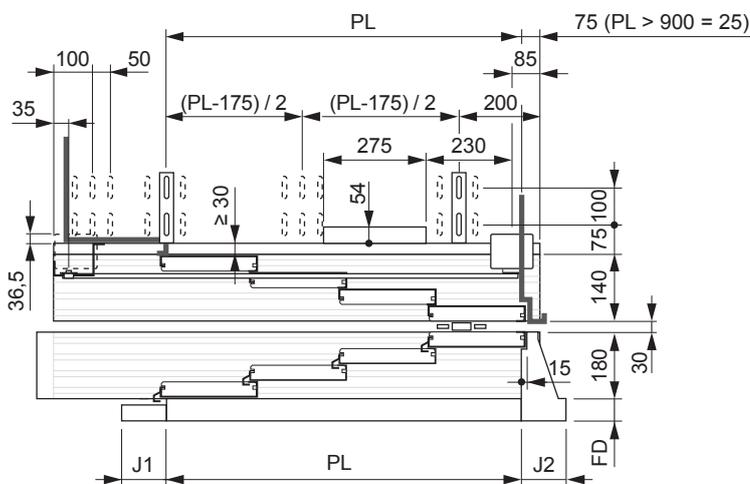
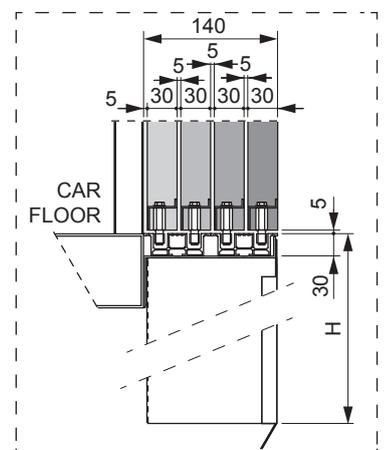


PL	600	650	700	750	800	850	900	1.000	1.100	1.200	1.300	1.400
C	850	910	975	1.035	1.100	1.160	1.225	1.300	1.425	1.550	1.675	1.800

- Notes:
- 1 For semiautomatic hinged landing door C = C - 50.
 - N Recommended vertical fixing point for brackets.
 - B For PL ≤ 900 = 100. For PL ≥ 950 = 160.
 - J1 - J2 See landing door technical data sheet for available dimensions.
 - FD 20 / 25 / 40 / 60 / 140.
 - * Full glass panel type only if X ≥ 195.
 - If not otherwise indicated all dimensions in mm.

Fermator
AUTOMATIC DOORS FOR LIFTS

Operator fixing bracket

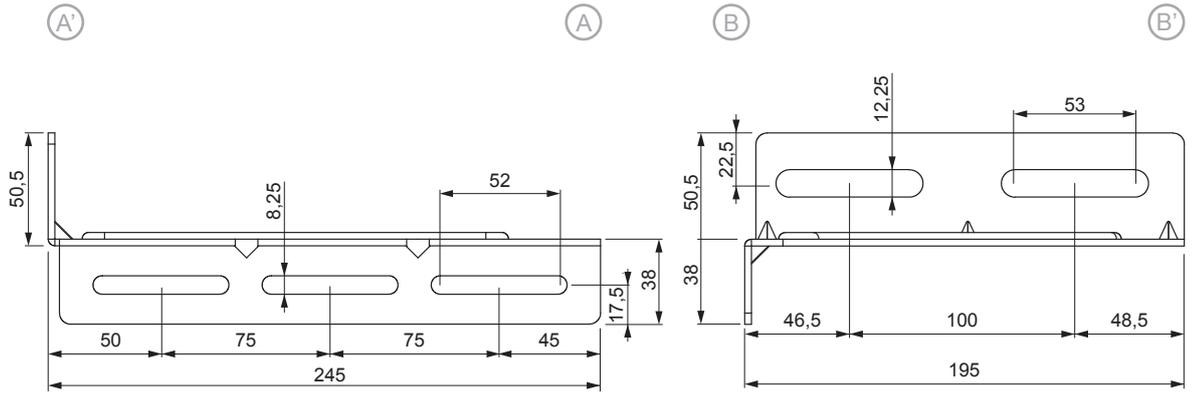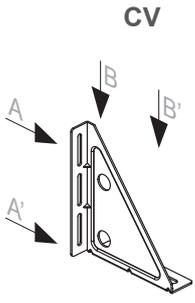

Fermator
AUTOMATIC DOORS FOR LIFTS

Support configuration

TYPES OF SUPPORT*

	Only VF circuit	VF circuit with emergency power supply for PL ≥ 800	VF circuit with emergency power supply for PL < 800
Standard execution			
IP54 execution			

*The external support ensures the easy access to the VF circuit controls within the PL.

ASSEMBLY OPTIONS

Faced to the landing.	Faced to the car roof.
<p>The type of support shown it is only a example, the assembly options are aviable for any type of support.</p>	



Sales contacts

General: info@fermator.com

Spain: info.es@fermator.com • Brazil: info.br@fermator.com • Italy: info.it@fermator.com • France: info.hp@fermator.com, info.ff@fermator.com
China: info.cn@fermator.com • India: info.in@fermator.com • Poland: info.pl@fermator.com • Germany: info.de@fermator.com
Middle East: info.tr@fermator.com • Nordic countries: info.se@fermator.com

www.fermator.com